


INOX - STANDARD



Product Specification

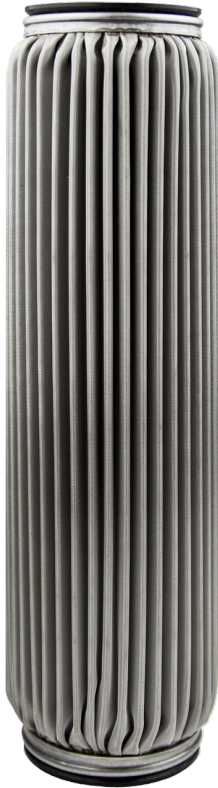

316L STAINLESS STEEL



260°C



sfwt.eu/sps



Ordering Details

Product Code	Micron (µm)	Standard Diameter Lengths (")	Seal Material
SPS	40, 75, 100, 250, 500, 850	9¾, 10, 20, 30, 40	STANDARD BUNA = B OPTIONAL EPDM = E TEFLON = T VITON = V
SPS	-	-	-

e.g. SPS-5-20-ESB

Packaging	9¾"	10"	20"	30"	40"
	1 at 0.5kg	1 at 0.5kg	1 at 1kg	1 at 1.5kg	1 at 2kg

Features & Information

- Available in a pleated stainless steel configuration, using no resin or glue based binders, this reusable cartridge offers the perfect choice for high temperature applications
- Offered in 40 to 850 micron with double open ended (AA) end caps
- The pleated construction of the SPS delivers an extra 0.1m² of surface area versus the cylindrical cartridge for improved flow and dirt holding
- The stainless steel construction of the SPS is suited to applications where aggressive solutions rule out less robust filter media